



3-seater sofa with upholstered seat and backrest and 4-legged aluminum injected base available in different finishes.

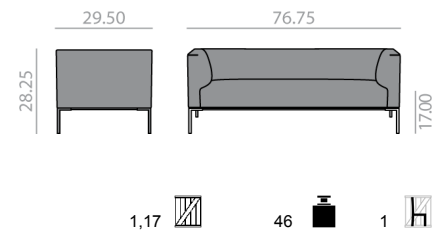

- Frame** 4-legged aluminum injected base.
- Seat** Solid beech structure with polypropylene elastic straps covered with flame retardant polyurethane flexible foam with a density between 25 kg/m<sup>3</sup> and 40 kg/m<sup>3</sup>.
- Back** Solid beech structure with flame retardant polyurethane flexible foam with a density between 55 lb/ft<sup>3</sup> and 88 lb/ft<sup>3</sup> (25 kg/m<sup>3</sup> and 40 kg/m<sup>3</sup>).
- Arms** Solid beech wood covered with flexible flame retardant polyurethane foam with density between 25 kg/m<sup>3</sup> and 40 kg/m<sup>3</sup>.
- Other materials** Zinc-nickel electrolyte screws. Galvanized staples. Polyvinyl acetate glue.
- Accessories** Polypropylene, felt or steel glides.

#### Fabrics

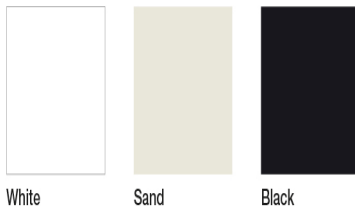

- Resistance and Quality** ISO 9001:2008  
UNE-EN 16139:2013
- Fireproof** BKZ 5.2  
BS 5852:1982 Part 2  
California Technical Bulletin 117  
UNE-EN 1021-1:2006  
UNI 9175 (class 1 IM)

**Sustainability**

ISO 14001:2004

ISO 14006:2011

level 1 ANSI/BIFMA