



2-seater corner sofa with upholstered seat and back and 4-legged injected aluminum base available in different finishes. Left side.

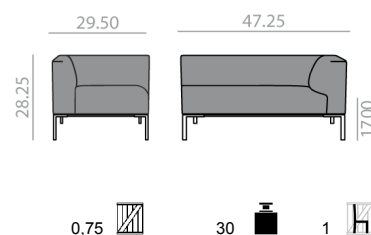

- Frame** 4-legged aluminum injected base.
- Seat** Solid beech structure with polypropylene elastic straps covered with flame retardant polyurethane flexible foam with a density between 25 kg/m³ and 40 kg/m³.
- Back** Solid beech structure with flame retardant polyurethane flexible foam with a density between 55 lb/ft³ and 88 lb/ft³ (25 kg/m³ and 40 kg/m³).
- Arms** Solid beech wood covered with flexible flame retardant polyurethane foam with density between 25 kg/m³ and 40 kg/m³.
- Other materials** Zinc-nickel electrolyte screws. Galvanized staples. Polyvinyl acetate glue.
- Accessories** Polypropylene, felt or steel glides.

Fabrics

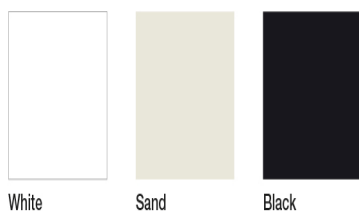

Resistance and Quality

ISO 9001:2008
UNE-EN 16139:2013

Fireproof

BKZ 5.2
BS 5852:1982 Part 2
California Technical Bulletin 117
UNE-EN 1021-1:2006
UNI 9175 (class 1 IM)

Sustainability

ISO 14001:2004

ISO 14006:2011

level 1 ANSI/BIFMA