



Table with top and legs in laminate HPL.

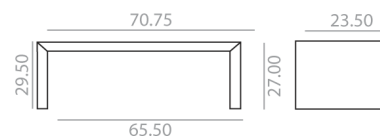

Top Oak 65 mm. thick corrugated board with solid edges.

Legs Oak 65 mm. thick corrugated board with solid edges.

Other materials Injected aluminum or galvanized steel led structural fittings and fastening. Protective felt 3 mm thick glides.

Accessories Connection box.

Laminated



Resistance and Quality ISO 9001:2008
UNE-EN 15372:2008

Sustainability FSC
ISO 14001:2004
ISO 14006:2011
level 1 ANSI/BIFMA