



3-seater sofa with upholstered seat and backrest, and solid beech wood frame.

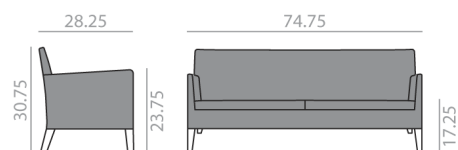

<b>Frame</b>	Solid beech legs and interior frame.
<b>Seat</b>	Solid beech structure with polypropylene elastic straps covered with flame retardant polyurethane flexible foam with a density between 25 kg/m <sup>3</sup> and 40 kg/m <sup>3</sup> .
<b>Back</b>	Covered in flexible flame retardant polyurethane foam with density between 55 lb/ft <sup>3</sup> and 88 lb/ft <sup>3</sup> (25 kg/m <sup>3</sup> and 40 kg/m <sup>3</sup> ).
<b>Arms</b>	Solid beech wood covered with flexible flame retardant polyurethane foam with density between 25 kg/m <sup>3</sup> and 40 kg/m <sup>3</sup> .
<b>Other materials</b>	Zinc-nickel electrolyte screws. Galvanized staples. Polyvinyl acetate glue.
<b>Accessories</b>	Polypropylene, felt or steel glides.
<b>Resistance and Quality</b>	ISO 9001:2008 UNE-EN 16139:2013
<b>Fireproof</b>	BKZ 5.2 BS 5852:1982 Part 2 California Technical Bulletin 117 UNE-EN 1021-1:2006 UNI 9175 (class 1 IM)
<b>Sustainability</b>	FSC ISO 14001:2004 ISO 14006:2011 level 1 ANSI/BIFMA